



BROWN
ARCHITECT INC.

P O B O X 13085
Bakersfield, Ca. 93389
661.834.9611

NOTHING IN THE DRAWINGS AND/OR SPECIFICATIONS SHALL BE CONSIDERED TO PERMIT AN INSTALLATION IN VIOLATION OF ANY APPLICABLE CODES AND/OR RESTRICTIONS. SHOULD ANY CHANGE IN THE DRAWINGS OR SPECIFICATIONS BE REQUIRED, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT AND OWNER AT ONCE AND MAKE SURE ON ALL PARTS OF THE PROJECT THAT ARE AFFECTED, THE WORK PERFORMED UNDER THIS CONTRACT SHALL BE IN FULL ACCORDANCE WITH THE LATEST RULES, REGULATIONS, RESTRICTIONS, AND CODE REQUIREMENTS WITHOUT ANY EXCEPTION.

COPYRIGHT 2017 PAUL A. BROWN ARCHITECT INC.
ALL RIGHTS RESERVED


Surf-Thru Carwash
11595 Oracle Rd.
Tucson AZ

Keynotes


- (12/24) 3 LOOP BIKE RACK - "RIBBON BIKE RACK # RB 95"
- (12/10) 6" PIPE BOLLARD SEE DETAIL 17 / A.1.1
- (14/1) CMU WALL - (CAPITOL PRODUCTS) SEE STRUCTURAL
- (14/2) STONE VENEER
- (12/25) TILE ROOFING M.C.A. OLD SAGUARO BLEND
- (17/26) 4" ABS. DRAIN TO DAYLIGHT THRU CURB SEE DETAIL 18 / A.1.1
- (17/27) 4" ABS. OVERFLOW DRAIN TO DAYLIGHT + 10'-0" A.F.F. 17 / A.8.0
- (17/28) 6" SHT. MTL. RAIN GUTTER AND DOWN SPOUT
- (12/10) MTL. ROLL UP DOOR SEE SHEET A.7.0
- (12/10) EXTERIOR ALUM. FRAMED STOREFRONT SYSTEM W/ DARK BRONZE FRAME / DUAL VANDAL RESISTANT GLAZING
- (12/11) 4'-0"X4'-4" ALUM. STOREFRONT WINDOW W/ DARK BRONZE FRAME / DUAL VANDAL RESISTANT GLAZING W/ INTERIOR MIRROR TINTS SEE DETAILS X / A.8.7
- (12/12) 4'-6"X5'-4" ALUM. STOREFRONT WINDOW W/ DARK BRONZE FRAME / DUAL VANDAL RESISTANT GLAZING SEE DETAILS X / A.8.7
- (12/13) ALUM. STOREFRONT W/ DARK BRONZE FRAME/ DUAL VANDAL RESISTANT SPANDREL GLAZING/ OBSCURE
- (12/14) INTERIOR ALUM. STORE FRONT SYSTEM, DARK BRONZE W/ DUAL CLEAR GLAZING. SEE PLANS FOR TEMPERED GLASS LOCATIONS
- (12/15) PINEAPPLE GROVE "45M-035" - COSTAL IVORY 14 / A.8.0
- (12/16) FRY REVIEW, PCS-75-50
- (12/17) FRY REVIEW, PCS-75-25
- (12/18) 7"R" EXTERIOR CEMENT PLASTER W/ OMEGA 44 ELASTOMERIC FINISH.
- (12/19) 3/4" EXTERIOR CEMENT PLASTER FINISH OVER HIGH-RIB MTL. LATH W/ ELASTOMERIC FINISH.
- (12/20) 18" X 18" HEAVY DUTY LOUVERED VENT MOUNTED @ + 8' A.F.F. SEE DETAIL 3 / A.8.1
- (12/21) CARWASH SIGNAGE - UNDER SEPARATE REVIEW AND PERMIT
- (12/22) STAINLESS STEEL CABLE TRELLIS. SEE DETAIL X / A.8.1
- (12/23) TACTILE RESTROOM SIGNAGE SEE DETAIL 12 / G.1.4
- (12/24) WASH SINK, SEE PLUMBING PLANS
- (12/25) MAIN PANEL, SEE ELECTRICAL PLANS

Exterior Finish Schedule


1	7"R" EXTERIOR CEMENT PLASTER W/ ELASTOMERIC TOP COAT - FIELD	DUNN EDWARDS DECT78 TRAUVENTINE LRV 55
2	7"R" EXTERIOR CEMENT PLASTER W/ ELASTOMERIC TOP COAT - ACCENT	DUNN EDWARDS DE6075 WOODLAKE LRV 24
3	STONE VENEER	VISTOSO STONE 'K'
4		
5		
6	TILE ROOFING	M.C.A. OLD SAGUARO BLEND
7		
8	STORE FRONT & GLAZING	DARK BRONZE ANODIZED FRAMES WITH DUAL VANDAL RESISTANT DBL. ONE WAY CLEAR GLAZING
9	STORE FRONT & GLAZING	DARK BRONZE ANODIZED FRAMES WITH DUAL VANDAL RESISTANT SPANDREL OBSCURE GLAZING
10	PARAPET CAP	DUNN EDWARDS DE6075 WOODLAKE LRV 24
11	DOOR SEE SCHEDULE	PAINT TO MATCH ADJACENT SURFACE
12	EXPOSED WOOD RAFTER TAILS	DUNN EDWARDS DE6074 DARK CHOCOLATE LRV 7
13	CEMENT PLASTER FASCI	DUNN EDWARDS DE6075 WOODLAKE LRV 24
14		
15	VACUUM CANOPY SOLAR PANELS BY SOLAR INSTALLER *REQUIRED SEPARATE APPROVAL	DUNN EDWARDS DECT78 TRAUVENTINE LRV 55
16	STORE FRONT & GLAZING	DARK BRONZE ANODIZED FRAMES WITH DUAL VANDAL RESISTANT DBL. CLEAR GLAZING

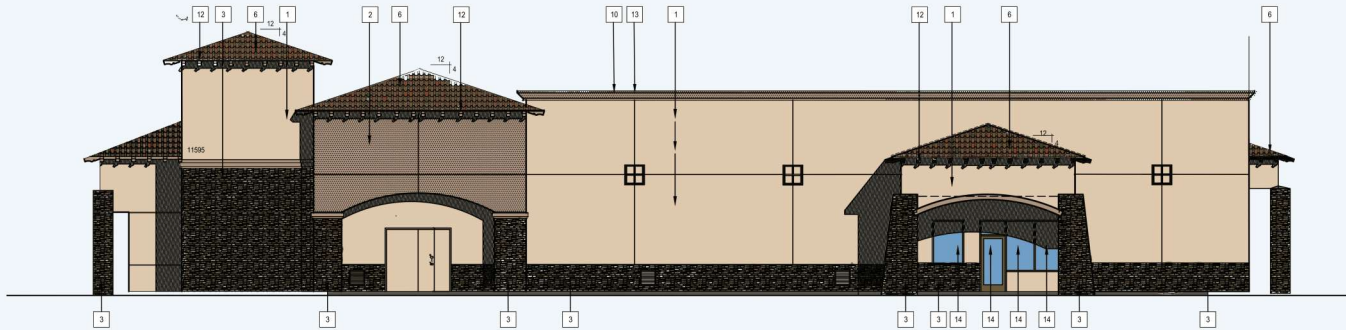


NORTH ELEVATION

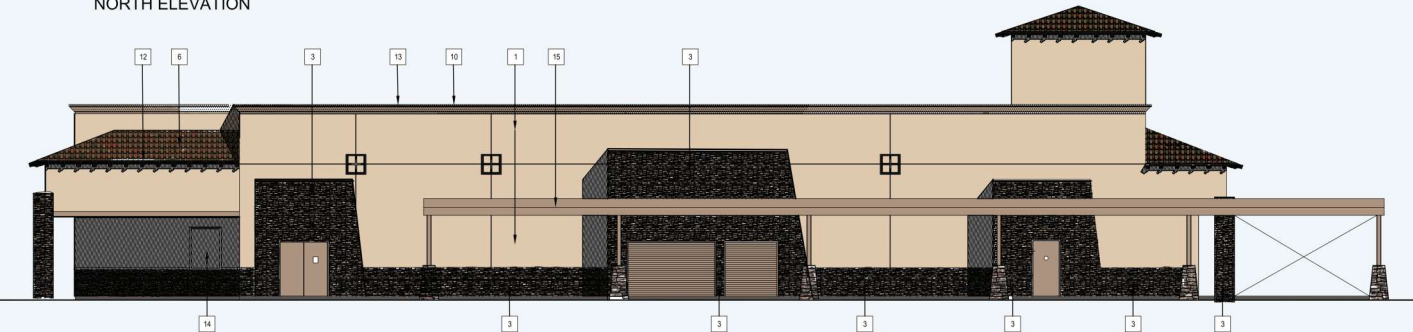

SOUTH ELEVATION

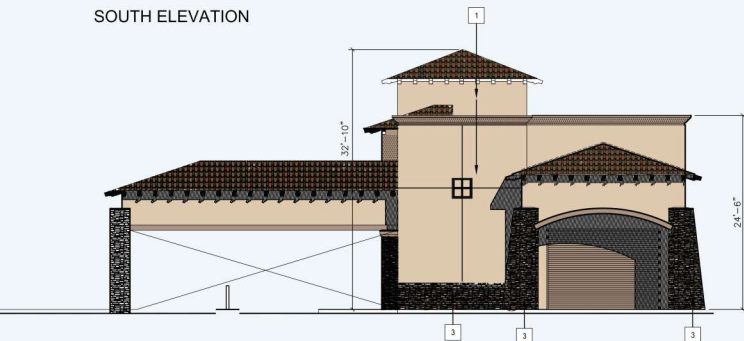

WEST ELEVATION

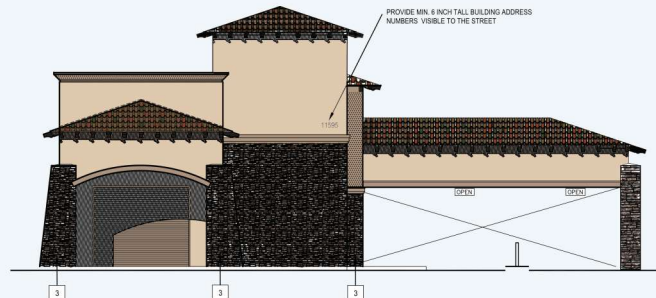

EAST ELEVATION

ARCHITECTURAL EXTERIOR ELEVATIONS


1/8"

DATE 4/5/2020

REV. 11/8/22





SHEET NO.

A.3.0
ARCHITETURAL
ELEVATIONS



PAUL
BROWN
ARCHITECT INC.
PO BOX 13085
Bakersfield, Ca. 93389
661.834.9611

Surf-Thru Carwash
11595 Orade Rd.
Tucson AZ

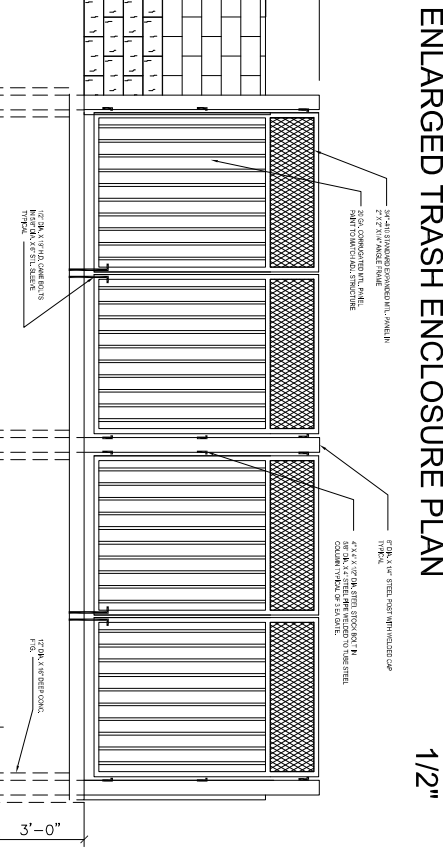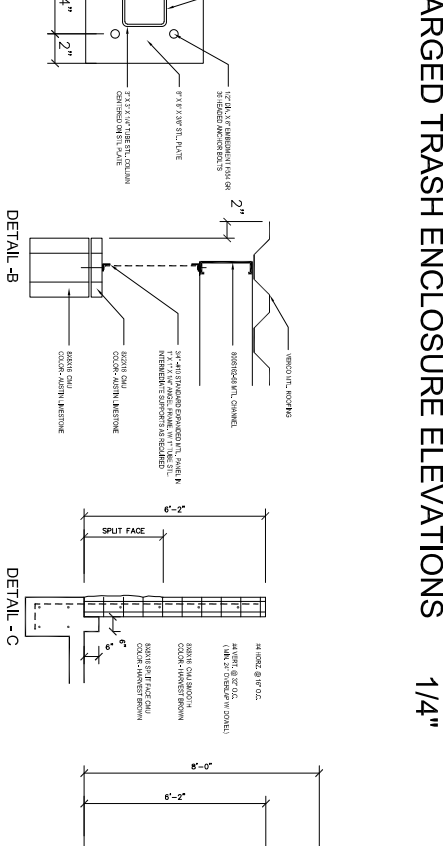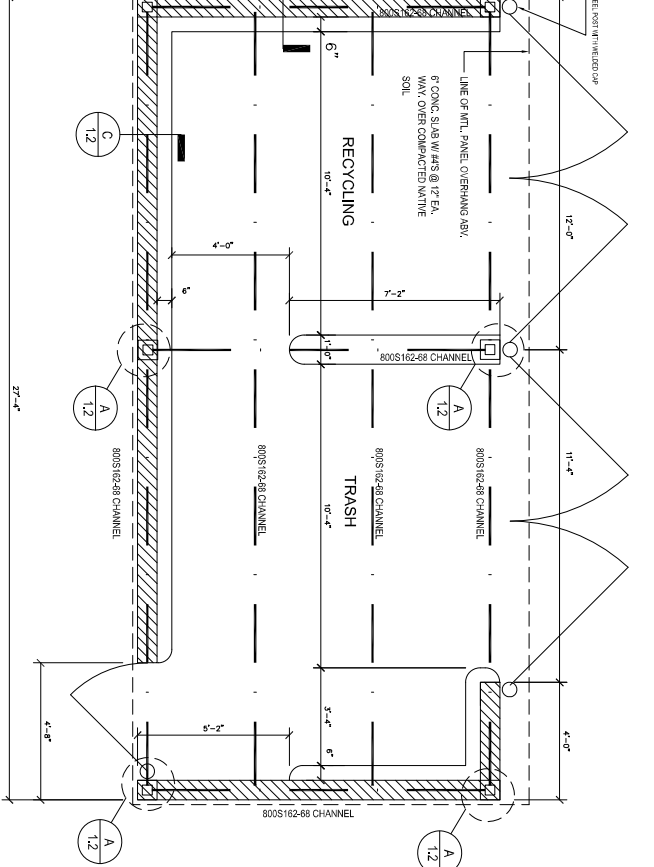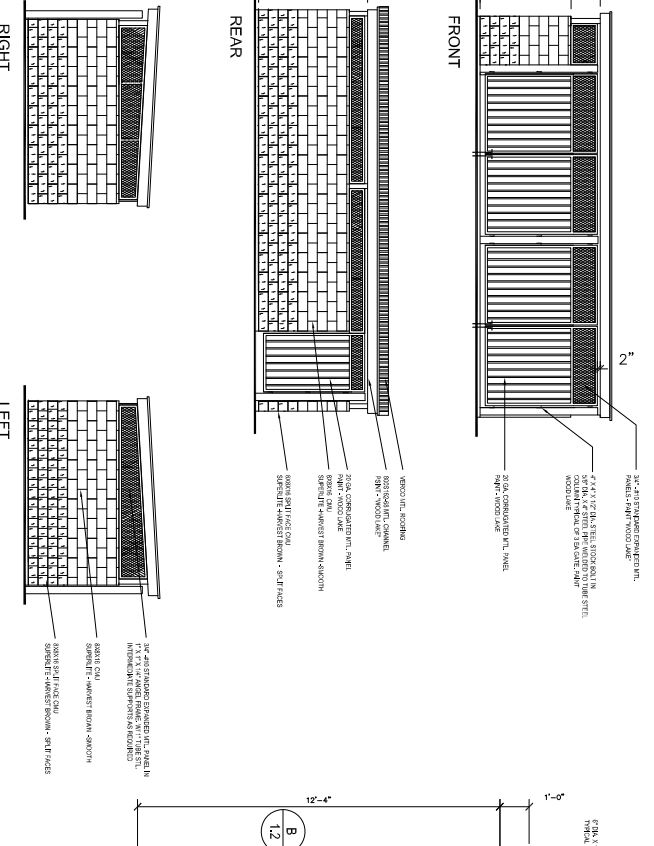

GATE FRAMING ELEVATION

- REFUSE CONTAINER ENCLOSURE NOTES:**

 1. MAJOR AND CHINE WALLS SHALL BE FULLY PROTECTED.
 2. ALL WORK SHALL COMPLY WITH THE CURRENT ADOPTION OF THE I.B.C.
 3. SLAB REINFORCING AND JOINTING CONCRETE SHALL BE CLASS PRECAST.
 4. MAJOR DESIGN IS BASED ON MIN. COMPRESSIVE STRENGTH OF 4000 PSI.
 5. REINFORCING BARS SHALL BE ACTUALLY GRADE AND TYPED BEFORE PLACEMENT AND SHALL BE CLEAN OF RUST AND NOT BEFORE PLACEMENT.
 6. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 7. GROUT STOP SHALL BE APPROVED BY THE MANUFACTURER.
 8. TO OBTAIN A BARRIER THAT STOPS THE FLOW OF GROUT WHEN PLACING BLOCK CELLS.
 9. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 10. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 11. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 12. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 13. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 14. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 15. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
- REFUSE CONTAINER ENCLOSURE CONCRETE APPROXIMATIONS:**

 1. ALL CONCRETE SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 2. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 3. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 4. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 5. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 6. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 7. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 8. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 9. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 10. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 11. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 12. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 13. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 14. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
 15. REINFORCING BARS SHALL BE CLASS PRECAST 28 DAY COMPRESSIVE STRENGTH + 3000 PSI.
- REFUSE CONTAINER GATE NOTES:**

 1. GATE LIFT TO BE PERMITTED TO MATCH ADJACENT BUILDING.
 2. DESIGN ENGINEERING AND CONSTRUCTION NOT SPECIFICALLY NOTED SHALL BE IN ACCORDANCE WITH ACCEPTABLE INDUSTRY STANDARDS AND OF THE MANUFACTURER.
 3. CONCRETE APPROX SHALL INCLUDE 3/4" STEEL PIPES FOR EACH GATE SET.
 4. GATE LIFT SHALL BE 10' 0" FOR EACH GATE ENCLOSURE.
 5. GATE LIFT SHALL BE 10' 0" FOR EACH GATE ENCLOSURE.

North view

Surf Thru Express

Legend



Google Earth

© 2022 Google



4.75 ft

North view

Surf Thru Express

Legend



Google Earth

© 2022 Google



5.51 ft

South

facing south at main entrance

Legend



Surf-thru Site Plan
For reference only

